

FEATURES:

- Designed for Ethernet 10G BASE-T applications
- Cable interface for isolation and low common mode emissions
- Compliant with IEEE 802.3an standard for 10G BASE-T
- Recognized by UL 60950-1

YUAN DEAN SCIENTIFIC




LAN Filters

Dual Port SERIES

10G Base-T

48PIN SMD

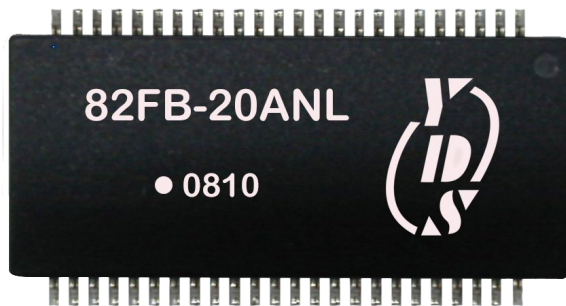

Electrical Specifications@25°C-Operating Temperature 0°C to 70°C

Part Number	Turns Ratio (±5%)	OCL (uH MIN)	Crosstalk (dB TYP)		Common Mode Rejection (dB TYP)			Comm. TO Diff. Rejection (dB TYP)			Hipot (Vrms)
	-----	100KHz/0.1V	1-100 MHz	100-500 MHz	1-100 MHz	100-300 MHz	300-500 MHz	1-100 MHz	100-300 MHz	300-500 MHz	@60Hz
82FB-20ANL	1CT:1CT	120	-40	-30	-37	-30	-25	-40	-30	-25	1500

Continue

Part Number	Insertion Loss (dB MAX)		Return Loss(PHY-Side) (dB MIN)@100Ω±15Ω			Return Loss(LINE-Side) (dB MIN)@100Ω±15Ω		
	0.1 MHz	1-400 MHz	1 MHz	2-100 MHz	100-500 MHz	1-40 MHz	40-400 MHz	400-500 MHz
82FB-20ANL	-3	-1	-23	-25	-12+21.6log(f/400)	-23	-23+10log(f/40)	-13+30log(f/400)

www.yds.com.tw



TEL : 886-6-3842899


FAX : 886-6-3843288

E-MAIL: ydsweb@yds.com.tw

Rev: 1 2020/09/01

Mechanicals and Dimensions

82FB-2X(Bottom Potting)

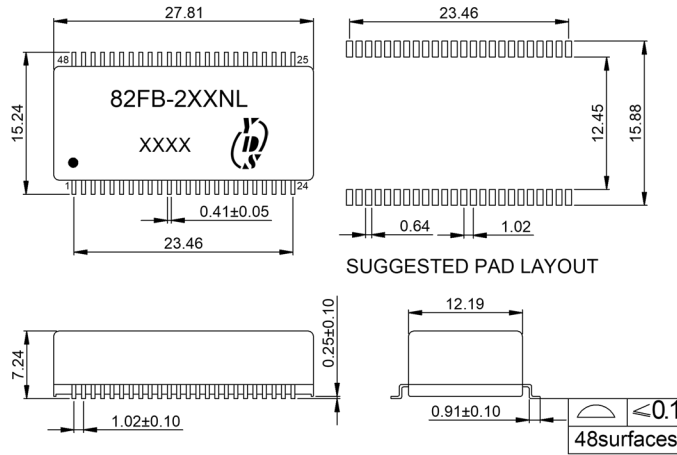

UNIT: mm Unless otherwise specified, all tolerances are ± 0.25

Schematics

82FB-20

